


# TECHNICAL DATA MANUAL

M-thermal Mono  
ATW Heat Pump

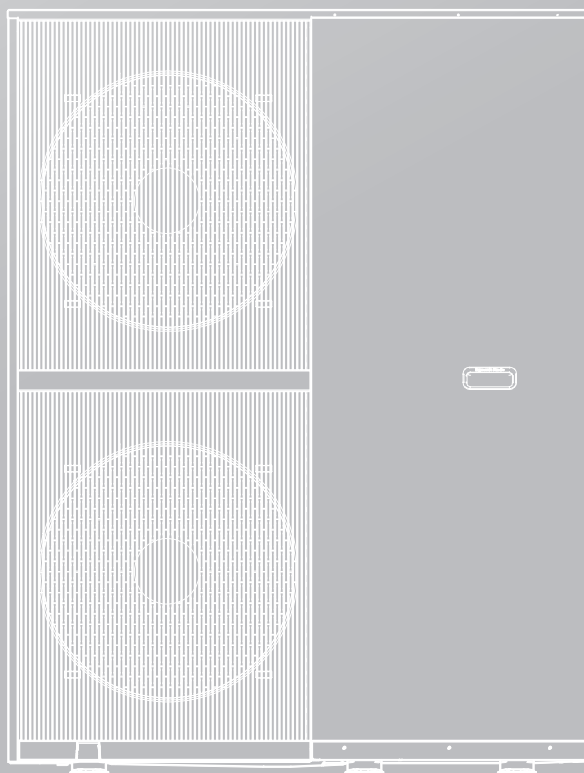

**IMPORTANT NOTE:**

Original instructions.  
Please read this manual carefully and keep it for future reference.  
All the pictures in this manual are for illustrations purpose only.



## Product fiche 1

Heat pump space heater		unit	MHC-V26WD2RN7-A2	MHC-V30WD2RN7-A2	MHC-V35WD2RN7-A2	MHC-V40WD2RN7-A2
Indoor unit sound power (*)		[dB(A)]	/	/	/	/
Outdoor unit sound power (*)		[dB(A)]	69	74	75	77
Capacity of the back-up heater integrated in the unit	Psup back-up heater	[kW]	0	0	0	0
off peak operation function integrated in Heat pump		Y/N	No	No	No	No
Space heating	Energy efficiency class 35 °C (Low temp. app.)	-	A+++	A+++	A+++	A++
Space heating	Energy efficiency class 55 °C (Medium temp. app.)	-	A+++	A++	A++	A++
Average climate (Design temperature= -10 °C)						
Space heating 35 °C	Prated(declared heating capacity) @-10 °C	[kW]	26	30	35	39
	Seasonal space heating efficiency( $\eta_s$ )	[%]	194.9	193.8	176.3	169.7
	Annual energy consumption	[kWh]	10 858	12 595	16 131	18 661
Space heating 55 °C	Prated(declared heating capacity) @-10 °C	[kW]	26	30	35	39
	Seasonal space heating efficiency( $\eta_s$ )	[%]	150.7	148.7	142.4	135.6
	Annual energy consumption	[kWh]	13 984	16 346	19 899	23 246
Part load conditions space heating average climate low temperature application						
(A) condition (-7 °C)	Pdh(declared heating capacity)	[kW]	21.96	26.40	29.67	29.67
	COPd (declared COP)	-	3.05	2.75	2.36	2.50
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(B) condition (2 °C)	Pdh(declared heating capacity)	[kW]	14.10	16.02	19.00	20.78
	COPd (declared COP)	-	4.61	4.68	4.50	4.26
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(C) condition (7 °C)	Pdh(declared heating capacity)	[kW]	9.83	10.93	12.24	13.59
	COPd (declared COP)	-	7.00	7.24	7.19	6.81
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(D) condition (12 °C)	Pdh(declared heating capacity)	[kW]	7.08	6.89	7.05	7.10
	COPd (declared COP)	-	9.14	9.02	9.57	9.81
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9

## Product fiche 2

Heat pump space heater		unit	MHC-V26WD2RN7-A2	MHC-V30WD2RN7-A2	MHC-V35WD2RN7-A2	MHC-V40WD2RN7-A2
(E) Tol(temperature operating limit)	Tol (temperature operating limit)	[°C]	-10	-10	-10	-10
	Pdh (declared heating capacity)	[kW]	25.17	30.34	30.33	30.34
	COPd (declared COP)	-	2.81	2.50	2.50	2.50
	WTOL (Heating water Operation Limit)	[°C]	85	85	85	85
(F) Tbivalent temperature	Tbiv	[°C]	-7	-7	-7	-5
	Pdh (declared heating capacity)	[kW]	21.96	26.40	29.67	31.60
	COPd (declared COP)	-	3.05	2.75	2.36	2.35
Supplementary capacity at P_design	Psup (@Tdesignh:-10 °C)	[kW]	0	0	0	4.47
Part load conditions space heating average climate medium temperature application						
(A) condition (-7 °C)	Pdh (declared heating capacity)	[kW]	23.26	27.36	30.66	32.08
	COPd (declared COP)	-	2.33	2.07	1.93	1.83
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(B) condition (2 °C)	Pdh (declared heating capacity)	[kW]	13.92	16.52	19.29	19.72
	COPd (declared COP)	-	3.68	3.72	3.54	3.34
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(C) condition (7 °C)	Pdh (declared heating capacity)	[kW]	9.49	10.74	12.5	14.11
	COPd (declared COP)	-	5.51	5.55	5.47	5.25
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(D) condition (12 °C)	Pdh (declared heating capacity)	[kW]	6.60	6.49	6.51	6.18
	COPd (declared COP)	-	6.25	7.09	7.28	6.67
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(E) Tol(temperature operating limit)	Tol (temperature operating limit)	[°C]	-10	-10	-10	-10
	Pdh (declared heating capacity)	[kW]	26.14	30.02	34.53	33.78
	COPd (declared COP)	-	1.98	1.89	1.79	1.77
	WTOL (Heating water Operation Limit)	[°C]	85	85	85	85
(F) Tbivalent temperature	Tbiv	[°C]	-7	-7	-7	-7
	Pdh (declared heating capacity)	[kW]	23.26	27.36	30.66	32.08
	COPd (declared COP)	-	2.33	2.07	1.93	1.83
Supplementary capacity at P_design	Psup (@Tdesignh:-10 °C)	[kW]	0	0	0.47	5.22

### Product fiche 3

Heat pump space heater		unit	MHC-V26WD2RN7-A2	MHC-V30WD2RN7-A2	MHC-V35WD2RN7-A2	MHC-V40WD2RN7-A2
Colder climate (Design temperature = -22 °C)						
Space heating 35 °C	Prated (declared heating capacity) @ -22°C	[kW]	25	28	34	34
	Seasonal space heating efficiency (ηs)	[%]	155.1	153.3	151.1	150.6
	Annual energy consumption	[kWh]	15 592	17 664	21 760	21 823
Space heating 55 °C	Prated (declared heating capacity) @ -22°C	[kW]	25	28	33.5	33.5
	Seasonal space heating efficiency (ηs)	[%]	126.2	122.8	118.1	117.1
	Annual energy consumption	[kWh]	19 078	21 950	27 265	27 514
Part load conditions space heating colder climate low temperature application						
condition (-15 °C)	Pdh (declared heating capacity)	[kW]	19.54	21.33	26.02	26.69
	COPd (declared COP)	-	2.63	2.56	2.29	2.31
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(A) condition (-7 °C)	Pdh (declared heating capacity)	[kW]	14.98	15.88	18.56	19.57
	COPd (declared COP)	-	3.40	3.56	3.49	3.14
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(B) condition (2 °C)	Pdh (declared heating capacity)	[kW]	9.42	10.76	11.32	12.29
	COPd (declared COP)	-	4.55	4.57	4.62	4.82
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(C) condition (7 °C)	Pdh (declared heating capacity)	[kW]	6.49	6.07	7.57	8.24
	COPd (declared COP)	-	7.03	6.40	6.57	7.02
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(D) condition (12 °C)	Pdh (declared heating capacity)	[kW]	6.95	6.92	6.92	6.49
	COPd (declared COP)	-	7.64	7.11	7.11	8.23
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(E) Tol(temperature operating limit)	Tol (temperature operating limit)	[°C]	-22	-22	-22	-22
	Pdh (declared heating capacity)	[kW]	16.82	18.43	22.96	22.95
	COPd (declared COP)	-	2.17	2.13	1.93	1.96
	WTOL (Heating water Operation Limit)	[°C]	85	85	85	85
(F) Tbivalent temperature	Tbiv	[°C]	-15	-7	-7	-7
	Pdh (declared heating capacity)	[kW]	19.54	15.88	18.56	19.57
	COPd (declared COP)	-	2.63	3.56	3.49	3.14
Supplementary capacity at P <sub>design</sub>	Psup (@Tdesign:-22 °C)	[kW]	8.19	9.57	11.04	11.05

## Product fiche 4

Heat pump space heater		unit	MHC-V26WD2RN7-A2	MHC-V30WD2RN7-A2	MHC-V35WD2RN7-A2	MHC-V40WD2RN7-A2
Part load conditions space heating colder climate medium temperature application						
condition (-15 °C)	Pdh (declared heating capacity)	[kW]	20.50	20.00	26.50	26.18
	COPd (declared COP)	-	2.09	2.07	1.90	1.83
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(A) condition (-7 °C)	Pdh (declared heating capacity)	[kW]	15.14	16.54	18.34	19.91
	COPd (declared COP)	-	2.64	2.50	2.33	2.43
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(B) condition (2 °C)	Pdh (declared heating capacity)	[kW]	9.28	10.71	11.80	11.47
	COPd (declared COP)	-	3.83	3.76	3.71	3.61
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(C) condition (7 °C)	Pdh (declared heating capacity)	[kW]	6.28	6.69	11.80	8.08
	COPd (declared COP)	-	5.14	5.52	3.71	5.29
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(D) condition (12 °C)	Pdh (declared heating capacity)	[kW]	6.63	6.84	6.84	5.96
	COPd (declared COP)	-	6.95	6.75	6.75	6.50
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(E) Tol(temperature operating limit)	Tol (temperature operating limit)	[°C]	-22	-22	-22	-22
	Pdh (declared heating capacity)	[kW]	16.61	19.95	24.34	23.19
	COPd (declared COP)	-	1.71	1.70	1.60	1.54
	WTOL (Heating water Operation Limit)	[°C]	85	85	85	85
(F) Tbivalent temperature	Tbiv	[°C]	-15	-7	-7	-7
	Pdh (declared heating capacity)	[kW]	15.14	16.54	18.34	19.91
	COPd (declared COP)	-	2.64	2.5	2.33	2.43
Supplementary capacity at P <sub>design</sub>	Psup (@Tdesignh:-22°C)	[kW]	7.39	8.05	9.16	10.31
Warmer climate (Design temperature =2 °C)						
Space heating 35 °C	Prated (declared heating capacity) @ 2 °C	[kW]	26	30	35	39
	Seasonal space heating efficiency (ηs)	[%]	259.8	247.5	240.3	210.8
	Annual energy consumption	[kWh]	5 287	6 399	7 687	9 746
Space heating 55 °C	Prated (declared heating capacity) @ 2 °C	[kW]	26	30	35	39
	Seasonal space heating efficiency (ηs)	[%]	194.8	193.1	187.1	177.1
	Annual energy consumption	[kWh]	7 025	8 177	9 838	11 573

## Product fiche 5

Heat pump space heater		unit	MHC-V26WD2RN7-A2	MHC-V30WD2RN7-A2	MHC-V35WD2RN7-A2	MHC-V40WD2RN7-A2
Part load conditions space heating warmer climate low temperature application						
(B) condition (2 °C)	Pdh (declared heating capacity)	[kW]	26.00	30.00	33.92	33.03
	COPd (declared COP)	-	3.66	3.19	2.56	2.44
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(C) condition (7 °C)	Pdh (declared heating capacity)	[kW]	16.70	19.09	22.44	24.06
	COPd (declared COP)	-	5.78	5.44	5.42	4.60
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(D) condition (12 °C)	Pdh (declared heating capacity)	[kW]	7.67	8.99	10.36	10.40
	COPd (declared COP)	-	8.52	8.42	8.43	8.32
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(E) Tol(temperature operating limit)	Tol (temperature operating limit)	[°C]	2	2	2	2
	Pdh (declared heating capacity)	[kW]	26.13	30.21	33.92	33.03
	COPd (declared COP)	-	3.66	3.19	2.56	2.44
	WTOL (Heating water Operation Limit)	[°C]	85	85	85	85
(F) Tbivalent temperature	Tbiv	[°C]	7	7	7	7
	Pdh (declared heating capacity)	[kW]	16.70	19.09	22.44	24.06
	COPd (declared COP)	-	5.78	5.44	5.42	4.60
Supplementary capacity at P <sub>design</sub>	Psup (@Tdesignh:2 °C)	[kW]	0	0	1.08	5.98
Part load conditions space heating warmer climate medium temperature application						
(B) condition (2 °C)	Pdh (declared heating capacity)	[kW]	26.00	29.76	33.06	32.88
	COPd (declared COP)	-	2.53	2.44	2.31	2.15
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(C) condition (7 °C)	Pdh (declared heating capacity)	[kW]	16.65	19.05	22.45	22.84
	COPd (declared COP)	-	4.11	4.03	3.98	3.94
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(D) condition (12 °C)	Pdh (declared heating capacity)	[kW]	7.76	9.14	10.06	10.91
	COPd (declared COP)	-	6.65	6.70	6.62	6.37
	Cdh(degradation coefficient)	-	0.9	0.9	0.9	0.9
(E) Tol(temperature operating limit)	Tol (temperature operating limit)	[°C]	2	2	2	2
	Pdh (declared heating capacity)	[kW]	26.00	29.76	33.06	32.88
	COPd (declared COP)	-	2.53	2.44	2.31	2.15
	WTOL (Heating water Operation Limit)	[°C]	85	85	85	85

## Product fiche 6

Heat pump space heater		unit	MHC-V26WD2RN7-A2	MHC-V30WD2RN7-A2	MHC-V35WD2RN7-A2	MHC-V40WD2RN7-A2
(F) Tbivalent temperature	Tbiv	[°C]	7	7	7	7
	Pdh (declared heating capacity)	[kW]	16.65	19.05	22.45	22.84
	COPd (declared COP)	-	4.11	4.03	3.98	3.94
Supplementary capacity at P <sub>design</sub>	Psup (@Tdesignh:2 °C)	[kW]	0	0.24	1.94	6.12
Ecodesign technical data						
Product description	Air-to-water heat pump	Y/N	Yes	Yes	Yes	Yes
	Water-to-water heat pump	Y/N	No	No	No	No
	Brine-to-water heat pump	Y/N	No	No	No	No
	Low-temperature heat pump	Y/N	No	No	No	No
	Equipped with a supplementary heater	Y/N	No	No	No	No
	Heat pump combination heater	Y/N	No	No	No	No
Air to water unit	Rated airflow (outdoor)	[m <sup>3</sup> /h]	10 500	10 500	10 500	10 500
Brine/water to water unit	Rated water/brine flow (outdoor H/E)	[m <sup>3</sup> /h]	/	/	/	/
Other	Capacity control	-	Inverter	Inverter	Inverter	Inverter
	Poff (Power consumption Off mode)	[kW]	0.014	0.014	0.014	0.014
	Pto (Power consumption Thermostat off mode)	[kW]	0.013	0.013	0.013	0.013
	Psb (Power consumption Standby mode)	[kW]	0.014	0.014	0.014	0.014
	PCK (Power crankcase heater model)	[kW]	0	0	0	0
	Qelec (Daily electricity consumption)	[kWh]	/	/	/	/
	Qfuel (Daily fuel consumption)	[kWh]	/	/	/	/
<p>Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.</p> <p>Product fiche data according to energy label directive 2010/30/EC regulation (EU) 811/2013.</p>						

## Technical parameters

Model(s):	MHC-V26WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	26	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	23.3	kW
Tj = 2 °C	Pdh	13.9	kW
Tj = 7 °C	Pdh	9.5	kW
Tj = 12 °C	Pdh	6.6	kW
Tj = bivalent temperature	Pdh	23.3	kW
Tj = operating limit	Pdh	26.1	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-/69	dB
Annual energy consumption	Q <sub>HE</sub>	13 981	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	150.7	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	2.33	-
Tj = 2 °C	COP <sub>d</sub>	3.68	-
Tj = 7 °C	COP <sub>d</sub>	5.51	-
Tj = 12 °C	COP <sub>d</sub>	6.25	-
Tj = bivalent temperature	COP <sub>d</sub>	2.33	-
Tj = operating limit	COP <sub>d</sub>	1.98	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	0	kW
Type of energy input	Electrical		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V26WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	25	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	15.1	kW
Tj = 2 °C	Pdh	9.3	kW
Tj = 7 °C	Pdh	6.3	kW
Tj = 12 °C	Pdh	6.6	kW
Tj = bivalent temperature	Pdh	15.1	kW
Tj = operating limit	Pdh	16.6	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-15	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW
Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-/69	dB
Annual energy consumption	Q <sub>HE</sub>	19 078	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	126.2	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	2.64	-
Tj = 2 °C	COP <sub>d</sub>	3.83	-
Tj = 7 °C	COP <sub>d</sub>	5.14	-
Tj = 12 °C	COP <sub>d</sub>	6.95	-
Tj = bivalent temperature	COP <sub>d</sub>	2.64	-
Tj = operating limit	COP <sub>d</sub>	1.71	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	7.39	kW
Type of energy input	-		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V26WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	26	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	26.0	kW
Tj = 2 °C	Pdh	16.7	kW
Tj = 7 °C	Pdh	7.8	kW
Tj = 12 °C	Pdh	16.7	kW
Tj = bivalent temperature	Pdh	16.7	kW
Tj = operating limit	Pdh	26.0	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW
Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-/69	dB
Annual energy consumption	Q <sub>HE</sub>	7 025	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	194.8	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COPd	-	-
Tj = 2 °C	COPd	2.53	-
Tj = 7 °C	COPd	4.11	-
Tj = 12 °C	COPd	6.65	-
Tj = bivalent temperature	COPd	4.11	-
Tj = operating limit	COPd	2.53	-
For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	0	kW
Type of energy input	-		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V30WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	30	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	27.5	kW
Tj = 2 °C	Pdh	16.6	kW
Tj = 7 °C	Pdh	10.8	kW
Tj = 12 °C	Pdh	6.5	kW
Tj = bivalent temperature	Pdh	27.5	kW
Tj = operating limit	Pdh	30.1	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-74	dB
Annual energy consumption	Q <sub>HE</sub>	16 346	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	148.7	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COPd	2.06	-
Tj = 2 °C	COPd	3.70	-
Tj = 7 °C	COPd	5.51	-
Tj = 12 °C	COPd	7.00	-
Tj = bivalent temperature	COPd	2.06	-
Tj = operating limit	COPd	1.88	-
For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	0	kW
Type of energy input	Electrical		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V30WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	28	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	16.5	kW
Tj = 2 °C	Pdh	10.7	kW
Tj = 7 °C	Pdh	6.7	kW
Tj = 12 °C	Pdh	6.8	kW
Tj = bivalent temperature	Pdh	16.5	kW
Tj = operating limit	Pdh	19.9	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-74	dB
Annual energy consumption	Q <sub>HE</sub>	21 950	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	122.8	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	2.50	-
Tj = 2 °C	COP <sub>d</sub>	3.76	-
Tj = 7 °C	COP <sub>d</sub>	5.52	-
Tj = 12 °C	COP <sub>d</sub>	6.75	-
Tj = bivalent temperature	COP <sub>d</sub>	2.50	-
Tj = operating limit	COP <sub>d</sub>	1.70	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	8.05	kW
Type of energy input	-		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η <sub>wh</sub>	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V30WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	30	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW
Tj = 2 °C	Pdh	29.8	kW
Tj = 7 °C	Pdh	19.1	kW
Tj = 12 °C	Pdh	9.1	kW
Tj = bivalent temperature	Pdh	19.1	kW
Tj = operating limit	Pdh	29.8	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW
Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-74	dB
Annual energy consumption	Q <sub>HE</sub>	8 177	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	193.1	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COPd	-	-
Tj = 2 °C	COPd	2.44	-
Tj = 7 °C	COPd	4.03	-
Tj = 12 °C	COPd	6.70	-
Tj = bivalent temperature	COPd	4.03	-
Tj = operating limit	COPd	2.44	-
For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	0.24	kW
Type of energy input	-		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q <sub>elec</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η <sub>wh</sub>	-	%
Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V35WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	35	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	30.8	kW
Tj = 2 °C	Pdh	19.4	kW
Tj = 7 °C	Pdh	12.5	kW
Tj = 12 °C	Pdh	5.0	kW
Tj = bivalent temperature	Pdh	6.5	kW
Tj = operating limit	Pdh	30.8	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-75	dB
Annual energy consumption	Q <sub>HE</sub>	19 899	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	142.4	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	1.92	-
Tj = 2 °C	COP <sub>d</sub>	3.51	-
Tj = 7 °C	COP <sub>d</sub>	5.43	-
Tj = 12 °C	COP <sub>d</sub>	7.18	-
Tj = bivalent temperature	COP <sub>d</sub>	1.92	-
Tj = operating limit	COP <sub>d</sub>	1.79	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	0.47	kW
Type of energy input	Electrical		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V35WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	33.5	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	18.3	kW
Tj = 2 °C	Pdh	11.8	kW
Tj = 7 °C	Pdh	8.2	kW
Tj = 12 °C	Pdh	6.8	kW
Tj = bivalent temperature	Pdh	18.3	kW
Tj = operating limit	Pdh	24.3	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-7	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW
Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-75	dB
Annual energy consumption	Q <sub>HE</sub>	27 265	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	118.1	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	2.33	-
Tj = 2 °C	COP <sub>d</sub>	3.71	-
Tj = 7 °C	COP <sub>d</sub>	5.49	-
Tj = 12 °C	COP <sub>d</sub>	6.75	-
Tj = bivalent temperature	COP <sub>d</sub>	2.33	-
Tj = operating limit	COP <sub>d</sub>	1.60	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	9.16	kW
Type of energy input	-		
For air-to-water heat pumps: Rated air flow rate, outdoors			
	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
	-	-	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q <sub>elec</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η <sub>wh</sub>	-	%
Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V35WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	35	kW	Seasonal space heating energy efficiency	$\eta_s$	187.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW	Tj = -7 °C	COPd	-	-
Tj = 2 °C	Pdh	33.1	kW	Tj = 2 °C	COPd	2.31	-
Tj = 7 °C	Pdh	22.4	kW	Tj = 7 °C	COPd	3.98	-
Tj = 12 °C	Pdh	10.2	kW	Tj = 12 °C	COPd	6.62	-
Tj = bivalent temperature	Pdh	22.4	kW	Tj = bivalent temperature	COPd	3.98	-
Tj = operating limit	Pdh	33.1	kW	Tj = operating limit	COPd	2.31	-
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	P <sub>cyh</sub>	-	kW	Cycling interval efficiency	COP <sub>cyh</sub>	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	85	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>off</sub>	0.014	kW	Rated heat output (**)	P <sub>sup</sub>	1.94	kW
Standby mode	P <sub>sb</sub>	0.013	kW	Type of energy input	-		
Thermostat-off mode	P <sub>to</sub>	0.014	kW				
Crankcase heater mode	P <sub>ck</sub>	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	-75	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h
Annual energy consumption	Q <sub>HE</sub>	9 838	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	$\eta_{wh}$	-	%
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)						

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V40WD2RN7-A2		
Air-to-water heat pump:	YES		
Water-to-water heat pump:	NO		
Brine-to-water heat pump:	NO		
Low-temperature heat pump:	NO		
Equipped with a supplementary heater:	NO		
Heat pump combination heater:	NO		
Declared climate condition:	AVERAGE		
Parameters are declared for medium-temperature application.			
<b>Heating Performance</b>			
Item	Symbol	Value	Unit
Rated heat output (*)	Prated	39	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	32.1	kW
Tj = 2 °C	Pdh	19.7	kW
Tj = 7 °C	Pdh	14.1	kW
Tj = 12 °C	Pdh	6.2	kW
Tj = bivalent temperature	Pdh	32.1	kW
Tj = operating limit	Pdh	33.8	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-7	°C
Cycling interval capacity for heating	P <sub>cyc</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW
Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-77	dB
Annual energy consumption	Q <sub>HE</sub>	23 246	kWh
Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	135.6	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	1.83	-
Tj = 2 °C	COP <sub>d</sub>	3.34	-
Tj = 7 °C	COP <sub>d</sub>	5.25	-
Tj = 12 °C	COP <sub>d</sub>	6.67	-
Tj = bivalent temperature	COP <sub>d</sub>	1.83	-
Tj = operating limit	COP <sub>d</sub>	1.77	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval efficiency	COP <sub>cyc</sub>	-	-
Heating water operating limit temperature	WTOL	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	5.22	kW
Type of energy input	-		
For air-to-water heat pumps: Rated air flow rate, outdoors			
	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
	-	-	m <sup>3</sup> /h
For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q <sub>elec</sub>	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η <sub>wh</sub>	-	%
Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
Annual fuel consumption	AFC	-	GJ
Contact details	GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)		
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).			
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.			

## Technical parameters

Model(s):	MHC-V40WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	33.5	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	19.9	kW
Tj = 2 °C	Pdh	11.5	kW
Tj = 7 °C	Pdh	8.1	kW
Tj = 12 °C	Pdh	6.0	kW
Tj = bivalent temperature	Pdh	19.9	kW
Tj = operating limit	Pdh	23.2	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	T <sub>biv</sub>	-7	°C
Cycling interval capacity for heating	P <sub>cych</sub>	-	kW
Degradation co-efficient (**)	C <sub>dh</sub>	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-77	dB
Annual energy consumption	Q <sub>HE</sub>	27 517	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	117.1	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	2.43	-
Tj = 2 °C	COP <sub>d</sub>	3.61	-
Tj = 7 °C	COP <sub>d</sub>	5.29	-
Tj = 12 °C	COP <sub>d</sub>	6.50	-
Tj = bivalent temperature	COP <sub>d</sub>	2.43	-
Tj = operating limit	COP <sub>d</sub>	1.54	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval efficiency	COP <sub>cyc</sub>	-	-
Heating water operating limit temperature	WTOL	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	10.31	kW
Type of energy input	-		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd  
(Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

## Technical parameters

Model(s):	MHC-V40WD2RN7-A2
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	39	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW
Tj = 2 °C	Pdh	32.9	kW
Tj = 7 °C	Pdh	22.8	kW
Tj = 12 °C	Pdh	10.9	kW
Tj = bivalent temperature	Pdh	22.8	kW
Tj = operating limit	Pdh	32.9	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	7	°C
Cycling interval capacity for heating	P <sub>psych</sub>	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	P <sub>off</sub>	0.014	kW
Standby mode	P <sub>sb</sub>	0.013	kW
Thermostat-off mode	P <sub>to</sub>	0.014	kW
Crankcase heater mode	P <sub>ck</sub>	0.000	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L <sub>WA</sub>	-77	dB
Annual energy consumption	Q <sub>HE</sub>	11 573	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η <sub>s</sub>	177.1	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COP <sub>d</sub>	-	-
Tj = 2 °C	COP <sub>d</sub>	2.15	-
Tj = 7 °C	COP <sub>d</sub>	3.94	-
Tj = 12 °C	COP <sub>d</sub>	6.37	-
Tj = bivalent temperature	COP <sub>d</sub>	3.94	-
Tj = operating limit	COP <sub>d</sub>	2.15	-
For air-to-water heat pumps: Tj = -15 °C	COP <sub>d</sub>	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval efficiency	COP <sub>cy</sub>	-	-
Heating water operating limit temperature	W <sub>TOL</sub>	85	°C
Supplementary heater			
Rated heat output (**)	P <sub>sup</sub>	6.12	kW
Type of energy input	-		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	10 500	m <sup>3</sup> /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m <sup>3</sup> /h

For heat pump combination heater:							
Declared load profile	-						
Daily electricity consumption	Q <sub>elec</sub>	-	kWh	Water heating energy efficiency	η <sub>wh</sub>	-	%
Annual electricity consumption	AEC	-	kWh	Daily fuel consumption	Q <sub>fuel</sub>	-	kWh
				Annual fuel consumption	AFC	-	GJ

Contact details: GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).  
 (\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

# Information requirements for comfort chillers

Model(s):	MHC-V26WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	26	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	205.3	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{dc}$	26.0	kW	$T_j=+35\text{ }^\circ\text{C}$	$EER_d$	3.10	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{dc}$	19.5	kW	$T_j=+30\text{ }^\circ\text{C}$	$EER_d$	4.19	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{dc}$	12.2	kW	$T_j=+25\text{ }^\circ\text{C}$	$EER_d$	5.85	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{dc}$	5.7	kW	$T_j=+20\text{ }^\circ\text{C}$	$EER_d$	7.92	-
Degradation co-efficient for chillers (*)	$C_{dc}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{OFF}$	0.014	kW	Crankcase heater mode	$P_{CK}$	0.000	kW
Thermostat-off mode	$P_{TO}$	0.017	kW	Standby mode	$P_{SB}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	$\text{m}^3/\text{h}$
Sound power level, indoors / outdoors	$L_{WA}$	-69	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x (**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	$\text{m}^3/\text{h}$
GWP of the refrigerant	-	0.02	kg $CO_2$ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{dc}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

# Information requirements for comfort chillers

Model(s):	MHC-V26WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	26	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	283.7	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{dc}$	26.0	kW	$T_j=+35\text{ }^\circ\text{C}$	$EER_d$	4.65	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{dc}$	19.5	kW	$T_j=+30\text{ }^\circ\text{C}$	$EER_d$	6.09	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{dc}$	12.4	kW	$T_j=+25\text{ }^\circ\text{C}$	$EER_d$	8.02	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{dc}$	6.4	kW	$T_j=+20\text{ }^\circ\text{C}$	$EER_d$	10.52	-
Degradation co-efficient for chillers (*)	$C_{dc}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{OFF}$	0.014	kW	Crankcase heater mode	$P_{CK}$	0.000	kW
Thermostat-off mode	$P_{TO}$	0.017	kW	Standby mode	$P_{SB}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	$\text{m}^3/\text{h}$
Sound power level, indoors / outdoors	$L_{WA}$	-69	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x (**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	$\text{m}^3/\text{h}$
GWP of the refrigerant	-	0.02	kg $CO_2$ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{dc}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

# Information requirements for comfort chillers

Model(s):	MHC-V30WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	30	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	196.8	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{dc}$	29.9	kW	$T_j=+35\text{ }^\circ\text{C}$	$EER_d$	2.88	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{dc}$	22.3	kW	$T_j=+30\text{ }^\circ\text{C}$	$EER_d$	3.97	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{dc}$	14.3	kW	$T_j=+25\text{ }^\circ\text{C}$	$EER_d$	5.38	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{dc}$	6.7	kW	$T_j=+20\text{ }^\circ\text{C}$	$EER_d$	8.56	-
Degradation co-efficient for chillers (*)	$C_{dc}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{OFF}$	0.014	kW	Crankcase heater mode	$P_{CK}$	0.000	kW
Thermostat-off mode	$P_{TO}$	0.017	kW	Standby mode	$P_{SB}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	$\text{m}^3/\text{h}$
Sound power level, indoors / outdoors	$L_{WA}$	-74	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x (**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	$\text{m}^3/\text{h}$
GWP of the refrigerant	-	0.02	kg $CO_2$ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{dc}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

# Information requirements for comfort chillers

Model(s):	MHC-V30WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	30	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	268.9	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{dc}$	30.3	kW	$T_j=+35\text{ }^\circ\text{C}$	$EER_d$	4.28	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{dc}$	22.4	kW	$T_j=+30\text{ }^\circ\text{C}$	$EER_d$	5.51	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{dc}$	14.4	kW	$T_j=+25\text{ }^\circ\text{C}$	$EER_d$	7.40	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{dc}$	6.4	kW	$T_j=+20\text{ }^\circ\text{C}$	$EER_d$	11.27	-
Degradation co-efficient for chillers (*)	$C_{dc}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{OFF}$	0.014	kW	Crankcase heater mode	$P_{CK}$	0.000	kW
Thermosat-off mode	$P_{TO}$	0.017	kW	Standby mode	$P_{SB}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	m <sup>3</sup> /h
Sound power level, indoors / outdoors	$L_{WA}$	-74	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x (**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m <sup>3</sup> /h
GWP of the refrigerant	-	0.02	kg CO <sub>2</sub> eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{dc}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

# Information requirements for comfort chillers

Model(s):	MHC-V35WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{\text{rated,c}}$	32	kW	Seasonal space cooling energy efficiency	$\eta_{\text{s,c}}$	190.0	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{\text{dc}}$	31.6	kW	$T_j=+35\text{ }^\circ\text{C}$	$\text{EER}_d$	2.64	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{\text{dc}}$	23.4	kW	$T_j=+30\text{ }^\circ\text{C}$	$\text{EER}_d$	3.93	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{\text{dc}}$	14.9	kW	$T_j=+25\text{ }^\circ\text{C}$	$\text{EER}_d$	5.39	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{\text{dc}}$	6.4	kW	$T_j=+20\text{ }^\circ\text{C}$	$\text{EER}_d$	7.69	-
Degradation co-efficient for chillers (*)	$C_{\text{dc}}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{\text{OFF}}$	0.014	kW	Crankcase heater mode	$P_{\text{CK}}$	0.000	kW
Thermosat-off mode	$P_{\text{TO}}$	0.017	kW	Standby mode	$P_{\text{SB}}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	m <sup>3</sup> /h
Sound power level, indoors / outdoors	$L_{\text{WA}}$	-/75	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x$ (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m <sup>3</sup> /h
GWP of the refrigerant	-	0.02	kg CO <sub>2</sub> eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{\text{dc}}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

# Information requirements for comfort chillers

Model(s):	MHC-V35WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{\text{rated,c}}$	35	kW	Seasonal space cooling energy efficiency	$\eta_{\text{s,c}}$	254.2	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{\text{dc}}$	35.1	kW	$T_j=+35\text{ }^\circ\text{C}$	$\text{EER}_d$	3.84	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{\text{dc}}$	26.3	kW	$T_j=+30\text{ }^\circ\text{C}$	$\text{EER}_d$	5.37	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{\text{dc}}$	16.7	kW	$T_j=+25\text{ }^\circ\text{C}$	$\text{EER}_d$	70.4	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{\text{dc}}$	7.4	kW	$T_j=+20\text{ }^\circ\text{C}$	$\text{EER}_d$	10.61	-
Degradation co-efficient for chillers (*)	$C_{\text{dc}}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{\text{OFF}}$	0.014	kW	Crankcase heater mode	$P_{\text{CK}}$	0.000	kW
Thermosat-off mode	$P_{\text{TO}}$	0.017	kW	Standby mode	$P_{\text{SB}}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	$\text{m}^3/\text{h}$
Sound power level, indoors / outdoors	$L_{\text{WA}}$	-/75	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x$ (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	$\text{m}^3/\text{h}$
GWP of the refrigerant	-	0.02	kg $\text{CO}_2$ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{\text{dc}}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

# Information requirements for comfort chillers

Model(s):	MHC-V40WD2RN7-A2							
Outdoor side heat exchanger of chiller:	Air to water							
Indoor side heat exchanger chiller:	Water							
Type:	Compressor driven vapour compression							
Driver of compressor:	Electric motor							
Item	Symbol	Value	Unit		Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	32	kW		Seasonal space cooling energy efficiency	$\eta_{s,c}$	190.0	%
Declared cooling capacity for part load at given outdoor temperature $T_j$					Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{dc}$	31.6	kW		$T_j=+35\text{ }^\circ\text{C}$	$EER_d$	2.64	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{dc}$	23.4	kW		$T_j=+30\text{ }^\circ\text{C}$	$EER_d$	3.93	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{dc}$	14.9	kW		$T_j=+25\text{ }^\circ\text{C}$	$EER_d$	5.39	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{dc}$	6.4	kW		$T_j=+20\text{ }^\circ\text{C}$	$EER_d$	7.69	-
Degradation co-efficient for chillers (*)	$C_{dc}$	0.9	-					
Power consumption in modes other than "active mode"								
Off mode	$P_{OFF}$	0.014	kW		Crankcase heater mode	$P_{CK}$	0.000	kW
Thermosat-off mode	$P_{TO}$	0.017	kW		Standby mode	$P_{SB}$	0.014	kW
Other items								
Capacity control	variable				For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	m <sup>3</sup> /h
Sound power level, indoors / outdoors	$L_{WA}$	-77	dB					
Emissions of nitrogen oxides (if applicable)	$NO_x$ (**)	-	mg/kWh input GCV		For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m <sup>3</sup> /h
GWP of the refrigerant	-	0.02	kg CO <sub>2</sub> eq (100years)					
Standard rating conditions used	Medium temperature application							
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China							
(*) If $C_{dc}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.								

# Information requirements for comfort chillers

Model(s):	MHC-V40WD2RN7-A2						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	39	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	245.8	%
Declared cooling capacity for part load at given outdoor temperature $T_j$				Declared energy efficiency ratio for part load at given outdoor temperature $T_j$			
$T_j=+35\text{ }^\circ\text{C}$	$P_{dc}$	37.8	kW	$T_j=+35\text{ }^\circ\text{C}$	$EER_d$	3.84	-
$T_j=+30\text{ }^\circ\text{C}$	$P_{dc}$	28.8	kW	$T_j=+30\text{ }^\circ\text{C}$	$EER_d$	5.15	-
$T_j=+25\text{ }^\circ\text{C}$	$P_{dc}$	18.4	kW	$T_j=+25\text{ }^\circ\text{C}$	$EER_d$	7.28	-
$T_j=+20\text{ }^\circ\text{C}$	$P_{dc}$	8.3	kW	$T_j=+20\text{ }^\circ\text{C}$	$EER_d$	9.31	-
Degradation co-efficient for chillers (*)	$C_{dc}$	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	$P_{OFF}$	0.014	kW	Crankcase heater mode	$P_{CK}$	0.000	kW
Thermosat-off mode	$P_{TO}$	0.017	kW	Standby mode	$P_{SB}$	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	10 500	m <sup>3</sup> /h
Sound power level, indoors / outdoors	$L_{WA}$	-/77	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x$ (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m <sup>3</sup> /h
GWP of the refrigerant	-	0.02	kg CO <sub>2</sub> eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	GD Midea Heating & Ventilating Equipment Co. , Ltd. Penglai industry Road, Beijiao, Shunde, Foshan, Guangdong, 528311 P.R. China						
(*) If $C_{dc}$ is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Condition(°C)	Model(s):	Capacity /W	Power input /W	COP
Ambient Temperature: 7/6 Water temperature: 30/35	MHC-V26WD2RN7-A2	26 000	5 450	4.77
	MHC-V30WD2RN7-A2	30 000	6 670	4.50
	MHC-V35WD2RN7-A2	35 000	8 400	4.17
	MHC-V40WD2RN7-A2	39 000	10 540	3.70
Ambient Temperature: 7/6 Water temperature: 40/45	MHC-V26WD2RN7-A2	26 000	6 820	3.81
	MHC-V30WD2RN7-A2	30 000	8 260	3.63
	MHC-V35WD2RN7-A2	35 000	10 050	3.48
	MHC-V40WD2RN7-A2	39 000	11 900	3.28
Ambient Temperature: 7/6 Water temperature: 47/55	MHC-V26WD2RN7-A2	26 000	7 850	3.31
	MHC-V30WD2RN7-A2	30 000	9 570	3.13
	MHC-V35WD2RN7-A2	35 000	11 750	2.98
	MHC-V40WD2RN7-A2	39 000	14 000	2.79
Ambient Temperature: 7/6 Water temperature: 55/65	MHC-V26WD2RN7-A2	26 000	9 860	2.64
	MHC-V30WD2RN7-A2	30 000	11 850	2.53
	MHC-V35WD2RN7-A2	35 000	14 600	2.40
	MHC-V40WD2RN7-A2	39 000	16 660	2.34
Ambient Temperature: 2/1 Water temperature: 30/35	MHC-V26WD2RN7-A2	22 600	6 108	3.70
	MHC-V30WD2RN7-A2	26 800	7 614	3.52
	MHC-V35WD2RN7-A2	30 400	9 870	3.08
	MHC-V40WD2RN7-A2	30 600	9 871	3.10
Ambient Temperature: 2/1 Water temperature: 40/45	MHC-V26WD2RN7-A2	22 600	7 180	3.15
	MHC-V30WD2RN7-A2	26 100	8 380	3.11
	MHC-V35WD2RN7-A2	30 000	11 200	2.68
	MHC-V40WD2RN7-A2	30 200	11 396	2.65
Ambient Temperature: 2/1 Water temperature: 47/55	MHC-V26WD2RN7-A2	21 950	8 100	2.71
	MHC-V30WD2RN7-A2	25 350	9 650	2.63
	MHC-V35WD2RN7-A2	29 600	12 060	2.45
	MHC-V40WD2RN7-A2	29 800	12 417	2.40
Ambient Temperature: -7/-8 Water temperature: 30/35	MHC-V26WD2RN7-A2	22 000	7 458	2.95
	MHC-V30WD2RN7-A2	26 000	9 091	2.86
	MHC-V35WD2RN7-A2	30 000	11 811	2.54
	MHC-V40WD2RN7-A2	30 000	12 000	2.50
Ambient Temperature: -7/-8 Water temperature: 40/45	MHC-V26WD2RN7-A2	20 100	7 530	2.67
	MHC-V30WD2RN7-A2	23 100	9 590	2.41
	MHC-V35WD2RN7-A2	26 900	12 000	2.24
	MHC-V40WD2RN7-A2	27 000	12 273	2.20

Condition(°C)	Model(s):	Capacity /W	Power input /W	COP
Ambient Temperature: -7/-8 Water temperature: 47/55	MHC-V26WD2RN7-A2	18 800	8 170	2.30
	MHC-V30WD2RN7-A2	21 300	9 600	2.22
	MHC-V35WD2RN7-A2	24 800	11 900	2.08
	MHC-V40WD2RN7-A2	25 000	12 376	2.02
Ambient Temperature: 35/24 Water temperature: 23/18	MHC-V26WD2RN7-A2	26 000	5 600	4.64
	MHC-V30WD2RN7-A2	30 000	6 800	4.41
	MHC-V35WD2RN7-A2	35 000	8 500	4.12
	MHC-V40WD2RN7-A2	39 000	9 850	3.96
Ambient Temperature: 35/24 Water temperature: 12/7	MHC-V26WD2RN7-A2	26 000	8 400	3.10
	MHC-V30WD2RN7-A2	30 000	10 700	2.80
	MHC-V35WD2RN7-A2	32 000	11 980	2.67
	MHC-V40WD2RN7-A2	32 000	11 980	2.67

**NOTE**

---

A series of horizontal dotted lines for writing notes.

**NOTE**

---

A series of horizontal dotted lines for writing notes.







16125300005382 V.A

