



ENERG

енергия · ενέργεια



MHA-V6W/D2N1 SMK-80/CD30GN1-B



55°C


35°C



43dB



66dB

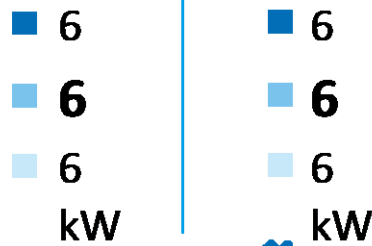

2015

811/2013

Technical parameters

Model(s):	Outdoor unit: MHA-V6W/D2N1 Indoor unit: SMK-80/CD30GN1-B
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	YES
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _J			
T _J = -7 °C	P _d	5.0	kW
T _J = 2 °C	P _d	3.5	kW
T _J = 7 °C	P _d	2.2	kW
T _J = 12 °C	P _d	1.6	kW
T _J = bivalent temperature	P _d	5.0	kW
T _J = operating limit	P _d	4.4	kW
For air-to-water heat pumps: T _J = -15 °C	P _d	-	kW
Bivalent temperature	T _{biv}	-5	°C
Cycling interval capacity for heating	P _{cy}	-	kW
Degradation co-efficient (**)	C _{dh}	0.9	-
Power consumption in modes other than active mode			
Off mode	P _{off}	0.017	kW
Standby mode	P _{sb}	0.017	kW
Thermostat-off mode	P _{to}	0.057	kW
Crankcase heater mode	P _{ck}	0.015	kW

Other items			
Capacity control	variable		
Sound power level, indoors/ outdoors	L _{WA}	41 / 62	dB
Annual energy consumption	Q _{HE}	3875	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	130	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _J			
T _J = -7 °C	COP _d	2.04	-
T _J = 2 °C	COP _d	3.19	-
T _J = 7 °C	COP _d	4.66	-
T _J = 12 °C	COP _d	7.07	-
T _J = bivalent temperature	COP _d	2.16	-
T _J = operating limit	COP _d	1.73	-
For air-to-water heat pumps: T _J = -15 °C	COP _d	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval efficiency	COP _{cy}	-	-
Heating water operating limit temperature	W _{TOL}	60	°C
Supplementary heater			
Rated heat output (**)	P _{sup}	1.9	kW
Type of energy input	Electrical		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	3180	m ³ /h
For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η _{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)						

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(T_J).
(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0.9.

Technical parameters

Model(s):	Outdoor unit: MHA-V6W/D2N1 Indoor unit: SMK-80/CD30GN1-B
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	YES
Heat pump combination heater:	NO
Declared climate condition:	COLDER
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit
Rated heat output (*)	P _{rated}	5	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _J			
T _J = -7 °C	P _{d,h}	3.6	kW
T _J = 2 °C	P _{d,h}	2.0	kW
T _J = 7 °C	P _{d,h}	1.3	kW
T _J = 12 °C	P _{d,h}	1.6	kW
T _J = bivalent temperature	P _{d,h}	4.2	kW
T _J = operating limit	P _{d,h}	3.1	kW
For air-to-water heat pumps: T _J = -15 °C	P _{d,h}	-	kW
Bivalent temperature	T _{biv}	-14	°C
Cycling interval capacity for heating	P _{cy, ch}	-	kW
Degradation co-efficient (**)	C _{dh}	0.9	--
Power consumption in modes other than active mode			
Off mode	P _{off}	0.017	kW
Standby mode	P _{sb}	0.017	kW
Thermostat-off mode	P _{to}	0.057	kW
Crankcase heater mode	P _{ck}	0.015	kW

Other items			
Capacity control	variable		
Sound power level, indoors/ outdoors	L _{WA}	-	dB
Annual energy consumption	Q _{HE}	4713	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	109	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _J			
T _J = -7 °C	COP _d	2.25	-
T _J = 2 °C	COP _d	3.37	-
T _J = 7 °C	COP _d	5.39	-
T _J = 12 °C	COP _d	7.44	-
T _J = bivalent temperature	COP _d	1.89	-
T _J = operating limit	COP _d	1.25	-
For air-to-water heat pumps: T _J = -15 °C	COP _d	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-20	°C
Cycling interval efficiency	COP _{cy, c}	-	-
Heating water operating limit temperature	W _{TOL}	60	°C
Supplementary heater			
Rated heat output (**)	P _{sup}	1.3	kW
Type of energy input	Electrical		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	3180	m ³ /h
For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:							
Declared load profile		-		Water heating energy efficiency	η _{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)						

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output P_{rated} is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_J).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0.9.

Technical parameters

Model(s):	Outdoor unit: MHA-V6W/D2N1 Indoor unit: SMK-80/CD30GN1-B
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	YES
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _J			
T _J = -7 °C	P _d	-	kW
T _J = 2 °C	P _d	6.2	kW
T _J = 7 °C	P _d	4.2	kW
T _J = 12 °C	P _d	1.9	kW
T _J = bivalent temperature	P _d	6.2	kW
T _J = operating limit	P _d	6.2	kW
For air-to-water heat pumps: T _J = -15 °C	P _d	-	kW
Bivalent temperature	T _{biv}	2	°C
Cycling interval capacity for heating	P _{cy}	-	kW
Degradation co-efficient (**)	C _{dh}	0.9	-
Power consumption in modes other than active mode			
Off mode	P _{off}	0.017	kW
Standby mode	P _{sb}	0.017	kW
Thermostat-off mode	P _{to}	0.057	kW
Crankcase heater mode	P _{ck}	0.015	kW

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L _{WA}	-	dB
Annual energy consumption	Q _{HE}	2293	kWh

Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η _s	143	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _J			
T _J = -7 °C	COP _d	-	-
T _J = 2 °C	COP _d	2.53	-
T _J = 7 °C	COP _d	3.44	-
T _J = 12 °C	COP _d	4.24	-
T _J = bivalent temperature	COP _d	2.53	-
T _J = operating limit	COP _d	2.53	-
For air-to-water heat pumps: T _J = -15 °C	COP _d	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval efficiency	COP _{cy}	-	-
Heating water operating limit temperature	W _{TOL}	60	°C
Supplementary heater			
Rated heat output (**)	P _{sup}	0	kW
Type of energy input	Electrical		

For air-to-water heat pumps: Rated air flow rate, outdoors	-	3180	m ³ /h
For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η _{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	GD Midea Heating & Ventilating Equipment Co. Ltd (Penglai industry road, Beijiao, Shunde, Foshan, Guangdong, P.R China)						

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(T_J).
(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.